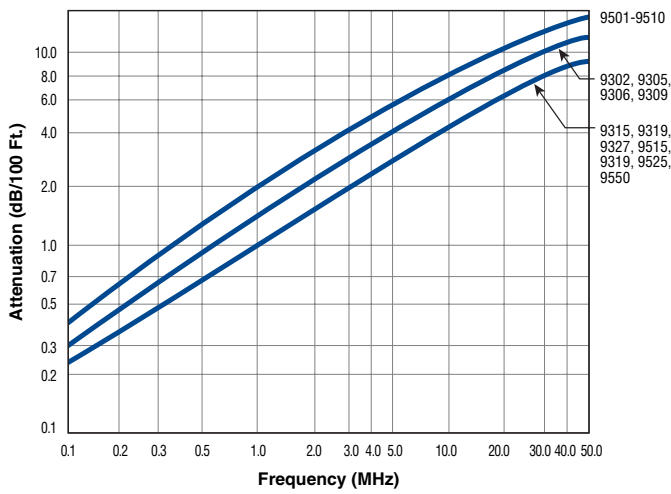


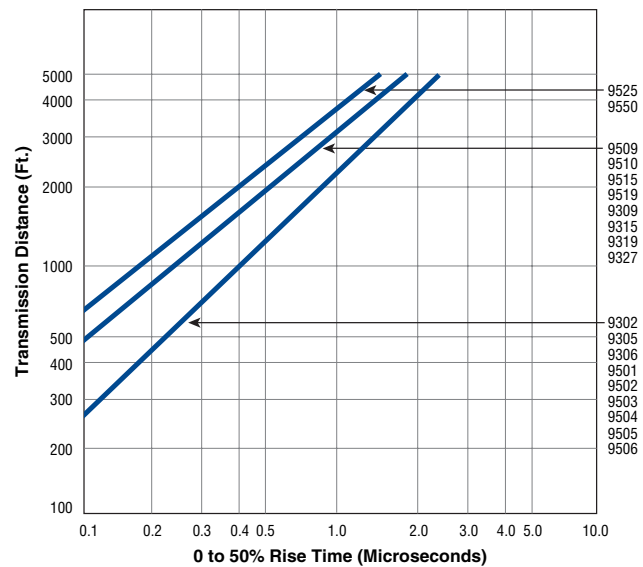
Overall Beldfoil® Shield

Cable Characteristics

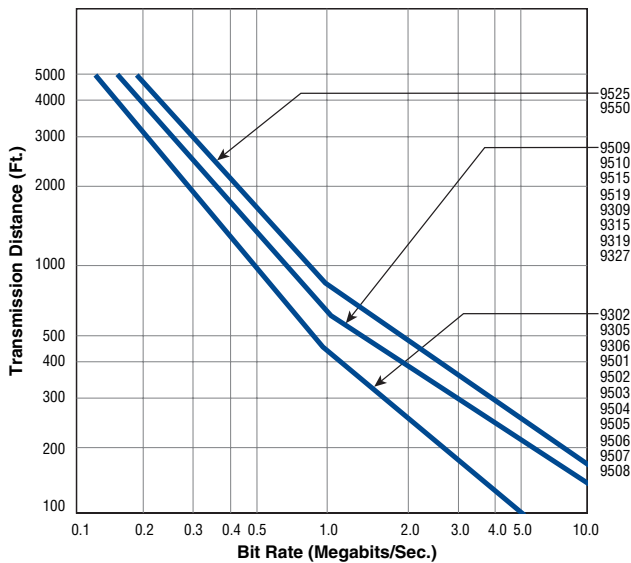
Attenuation



Rise Time



Bit Rate



Cables are terminated in their characteristic impedance. Signal source electrical characteristics: 50 ohms and 10% to 90% rise time less than 5 nanoseconds.


Charts assume 5% peak-to-peak time jitter as determined by eye pattern measurements of pseudorandom NRZ code.

Overall Beldfoil® Shield

High-Temperature Control and Instrumentation Cables and Computer Cables for EIA RS-232 Applications


Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Nominal Capacitance			
					Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

20 AWG Stranded (7x28) TC Conductors • Pairs Cabled Together • Overall Beldfoil® Shield (100% Coverage) • Drain Wire

Tefzel® Insulation • Clear Tefzel Jacket																			
High-Temperature 300V RMS, 150°C VW-1	85164	4	See Chart 3 (Tech Info Section)	100	30.5	6.6	3.0	.015	.38	.025	.64	.344	8.74	23	75	40	131		
				500†	152.4	37.0	16.8												
				1000†	304.8	71.0	32.3												
	85168	8	See Chart 3 (Tech Info Section)	100	30.5	11.5	5.2	.015	.38	.025	.64	.439	11.15	23	75	40	131		
				500†	152.4	62.0	28.2												
				1000†	304.8	126.0	57.3												

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

24 AWG Stranded (7x32) TC Conductors • Twisted Pairs • Overall Beldfoil Shield (100% Coverage) • 24 AWG Stranded TC Drain Wire

Semi-rigid PVC Insulation • Chrome PVC Jacket																			
UL AWM Style 2464 (300V 80°C) CSA AWM I A	9501	NEC: 1 CMG CEC: CMG FT4	See Chart 3 (Tech Info Section)	100	30.5	2.1	1.0	24.0Ω/M'	18.0Ω/M'	.156	3.96	75	60%	40	131	74	243		
				U-500	U-152.4	7.5	3.4	78.7Ω/km	59.1Ω/km										
				500	152.4	7.0	3.2												
				U-1000	U-304.8	14.0	6.4												
				1000	304.8	14.0	6.4												
	9502††	NEC: 2 CMG CEC: CMG FT4 P-MSHA-SC-7K-182037	See Chart 3 (Tech Info Section)	100	30.5	3.7	1.7	24.0Ω/M'	17.0Ω/M'	.222	5.64	75	60%	30	98	50	164		
				U-500	U-152.4	15.0	6.8	78.7Ω/km	55.8Ω/km										
				500	152.4	14.5	6.6												
				U-1000	U-304.8	28.0	12.7												
				1000	304.8	30.0	13.6												
				10000	3048.0	290.0	131.8												
Shorting Fold	9503	NEC: 3 CMG CEC: CMG FT4	See Chart 3 (Tech Info Section)	100	30.5	3.4	1.5	24.0Ω/M'	17.0Ω/M'	.232	5.89	75	60%	30	98	50	164		
				U-500	U-152.4	15.0	6.8	78.7Ω/km	55.8Ω/km										
				500	152.4	14.5	6.6												
				U-1000	U-304.8	28.0	12.7												
				1000	304.8	30.0	13.6												
9504	NEC: 4 CMG CEC: CMG FT4	See Chart 3 (Tech Info Section)	See Chart 3 (Tech Info Section)	100	30.5	4.0	1.8	24.0Ω/M'	17.0Ω/M'	.265	6.73	75	60%	30	98	50	164		
				U-500	U-152.4	18.0	8.2	78.7Ω/km	55.8Ω/km										
				500	152.4	16.5	7.5												
				U-1000	U-304.8	35.0	15.9												
				1000	304.8	36.0	16.3												
9505	NEC: 5 CMG CEC: CMG FT4	See Chart 3 (Tech Info Section)	See Chart 3 (Tech Info Section)	100	30.5	4.7	2.1	24.0Ω/M'	17.0Ω/M'	.289	7.34	75	60%	30	98	50	164		
				U-500	U-152.4	21.5	9.8	78.7Ω/km	55.8Ω/km										
				500	152.4	23.0	10.4												
				U-1000	U-304.8	41.0	18.6												
				1000	304.8	43.0	19.5												

DCR = DC Resistance • TC = Tinned Copper

* Capacitance between conductors.

** Capacitance between one conductor and other conductors connected to shield.

† Spools are one piece, but length may vary ±10% from length shown.

†† Pennsylvania Department of Environmental Resources and United States Mine Safety and Health Administration certification. Request quotations of RG/U cables not listed.

See Attenuation, Rise Time and Bit Rate data for this series on page 5.10.

Tefzel is a DuPont trademark.



Overall Beldfoil® Shield

Computer Cables for EIA RS-232 Applications

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m
24 AWG Stranded (7x32) TC Conductors • Twisted Pairs • Overall Beldfoil Shield (100% Coverage) • 24 AWG Stranded TC Drain Wire (continued)																		
Semi-rigid PVC Insulation • Chrome PVC Jacket																		
UL AWM Style 2464 (300V 80°C) CSA AWM I A	9506	NEC:	6	See	100	30.5	5.0	2.3	24.0Ω/M'	16.0Ω/M'	.289	7.34	75	60%	30	98	50	164
		CMG		Chart 3	U-500	U-152.4	23.0	10.4	78.7Ω/km	52.5Ω/km								
		CEC:		(Tech Info	500	152.4	25.0	11.3							For Plenum version of 9506, see 82506.			
		CMG FT4		Section)	U-1000	U-304.8	45.0	20.4										
					1000	304.8	47.0	21.4										
	9507	NEC:	7	See	100	30.5	5.5	2.5	24.0Ω/M'	16.5Ω/M'	.294	7.47	75	60%	30	98	50	164
		CMG		Chart 3	U-500	U-152.4	25.0	11.3	78.7Ω/km	54.1Ω/km								
		CEC:		(Tech Info	500	152.4	27.0	12.3										
		CMG FT4		Section)	U-1000	U-304.8	49.0	22.2										
					1000	304.8	51.0	23.1										
	9508	NEC:	8	See	100	30.5	6.3	2.9	24.0Ω/M'	16.5Ω/M'	.324	8.23	75	60%	30	98	50	164
		CMG		Chart 3	U-500	U-152.4	30.5	13.8	78.7Ω/km	54.1Ω/km								
		CEC:		(Tech Info	1000	304.8	60.0	27.2										
		CMG FT4		Section)														
	9509	NEC:	9	See	100	30.5	6.9	3.1	24.0Ω/M'	16.5Ω/M'	.334	8.48	75	60%	30	98	50	164
		CMG		Chart 3	U-500	U-152.4	33.5	15.2	78.7Ω/km	54.1Ω/km								
		CEC:		(Tech Info	1000	304.8	67.0	30.4							For Plenum version of 9509, see 82509.			
		CMG FT4		Section)														
	9510	NEC:	10	See	100	30.5	7.5	3.4	24.0Ω/M'	16.5Ω/M'	.368	9.34	75	60%	30	98	50	164
		CMG		Chart 3	U-500	U-152.4	36.5	16.6	78.7Ω/km	54.1Ω/km								
		CEC:		(Tech Info	1000	304.8	74.0	33.6										
		CMG FT4		Section)														
	9515	NEC:	15	See	100	30.5	10.4	4.7	24.0Ω/M'	16.5Ω/M'	.417	10.6	75	60%	30	98	50	164
		CMG		Chart 3	U-500	U-152.4	52.0	23.6	78.7Ω/km	54.1Ω/km								
		CEC:		(Tech Info	1000	304.8	102.0	46.4										
		CMG FT4		Section)														
	9519	NEC:	19	See	100	30.5	12.8	5.8	24.0Ω/M'	16.5Ω/M'	.448	11.4	75	60%	30	98	50	164
		CMG		Chart 3	U-500	U-152.4	61.5	28.0	78.7Ω/km	54.1Ω/km								
		CEC:		(Tech Info	1000	304.8	122.0	55.5										
		CMG FT4		Section)														
	9525	NEC:	25	See	100	30.5	16.0	7.3	24.0Ω/M'	16.5Ω/M'	.503	12.8	75	60%	30	98	50	164
		CMG		Chart 3	U-500	U-152.4	79.5	36.1	78.7Ω/km	54.1Ω/km								
		CEC:		(Tech Info	1000	304.8	155.0	70.3										
		CMG FT4		Section)														
	9550	NEC:	50	Request	100	30.5	31.9	14.5	24.0Ω/M'	15.2Ω/M'	.708	18.0	75	60%	30	98	50	164
		CMG		Technical	500 [†]	152.4	153.5	69.8	78.7Ω/km	49.9Ω/km								
		CEC:		Bulletin	1000 [†]	304.8	311.0	141.4										
		CMG FT4		T/8-4														

DCR = DC Resistance • TC = Tinned Copper

*Capacitance between conductors.

**Capacitance between one conductor and other conductors connected to shield.

† Spools are one piece, but length may vary -0% to +20% from length shown.

See Attenuation, Rise Time and Bit Rate data for this series on page 5.10.

Overall Beldfoil® Shield


Computer Cables for EIA RS-232 Applications

Plenum-Rated


Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Nominal Capacitance			
					Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

24 AWG Stranded (7x32) TC Conductors • Twisted Pairs • Overall Beldfoil Shield (100% Coverage) • 24 AWG Stranded TC Drain Wire

Plenum • FEP Insulation • Natural Flamarrest® Jacket

	300V RMS	82641	NEC: CMP CEC: CMP FT6	1	See Chart 3 (Tech Info Section)	U-1000† 1000†	U-304.8 304.8	9.0 8.0	4.1 3.6	.006 .15	.15 .014	.36 .36	.106 2.69	31	102	59	194
		82502	NEC: CMP CEC: CMP FT6	2	See Chart 3 (Tech Info Section)	U-500† 1000†	U-152.4 U-304.8	8.0 16.0	3.6 7.3	.006 .15	.15 .014	.36 .36	.162 4.11	25	82	45	148
		82503	NEC: CMP CEC: CMP FT6	3	See Chart 3 (Tech Info Section)	U-1000† 1000†	U-304.8 304.8	19.0 18.0	8.6 8.2	.006 .15	.15 .014	.36 .36	.169 4.29	25	82	45	148
		82504	NEC: CMP CEC: CMP FT6	4	See Chart 3 (Tech Info Section)	U-1000† 1000†	U-304.8 304.8	24.0 26.0	10.9 11.8	.006 .15	.15 .014	.36 .36	.193 4.90	25	82	45	148
		82505	NEC: CMP CEC: CMP FT6	5	See Chart 3 (Tech Info Section)	U-1000† 1000†	U-304.8 304.8	29.0 31.0	13.2 14.0	.006 .15	.15 .015	.38 .38	.196 4.98	25	82	45	148
		82506	NEC: CMP CEC: CMP FT6	6	See Chart 3 (Tech Info Section)	U-500† 1000†	U-152.4 U-304.8	17.5 34.0	8.0 15.5	.006 .15	.15 .015	.38 .38	.209 5.31	25	82	45	148
		82509	NEC: CMP CEC: CMP FT6	9	See Chart 3 (Tech Info Section)	1000†	304.8	49.0	22.3	.006 .15	.15 .015	.38 .38	.246 6.25	23	75	42	138

Plenum • FEP Insulation • Red FEP Jacket

	300V RMS	88641	NEC: CMP CEC: CMP FT6	1	See Chart 3 (Tech Info Section)	100 500† 1000†	30.5 152.4 304.8	2.4 6.0 9.0	1.1 2.7 4.1	.006 .15	.15 .014	.36 .36	.106 2.69	31	102	59	194
		89503	NEC: CMP CEC: CMP FT6	3	See Chart 3 (Tech Info Section)	100 500† 1000†	30.5 152.4 304.8	4.0 10.5 21.0	1.8 4.8 9.5	.006 .15	.15 .014	.36 .36	.175 4.45	21	69	40	131
		89504	NEC: CMP CEC: CMP FT6	4	See Chart 3 (Tech Info Section)	500† 1000†	152.4 304.8	13.0 29.0	6.0 13.1	.006 .15	.15 .014	.36 .36	.192 4.88	21	69	40	131
		89505	NEC: CMP CEC: CMP FT6	5	See Chart 3 (Tech Info Section)	100 1000†	30.5 304.8	4.9 33.0	2.2 15.0	.006 .15	.15 .014	.36 .36	.197 5.00	21	69	40	131

TC = Tinned Copper


* Capacitance between conductors.

** Capacitance between one conductor and other conductors connected to shield.

† Spools and/or UnReel® cartons are one piece, but length may vary ±10% for spools and ±5% for UnReel from length shown.

Overall Beldfoil® Shield

Low-Capacitance Computer Cables for EIA RS-232 and EIA RS-485 Applications

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m
28 AWG Stranded (7x36) TC Conductors • Twisted Pairs • Overall Beldfoil Shield (100% Coverage) • 28 AWG Stranded TC Drain Wire																		
Datalene® Insulation • Chrome PVC Jacket																		
 <p>UL AWM Style 2919 (30V 80°C)</p> <p>Z-Fold®</p>	8132FO	NEC: CL2	2	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	8.5 20.0	3.9 9.1	65.0Ω/M' 213.0Ω/km	23.1Ω/M' 75.8Ω/km	.215 5.46	120	78%	11.0	36.1	20.0	65.6	
	8133FO	NEC: CL2	3	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	11.0 20.0	5.0 9.1	65.0Ω/M' 213.0Ω/km	23.1Ω/M' 75.8Ω/km	.250 6.35	120	78%	11.0	36.1	20.0	65.6	
	8134FO	NEC: CL2	4	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	13.5 31.0	6.1 14.1	65.0Ω/M' 213.0Ω/km	20.0Ω/M' 65.6Ω/km	.270 6.86	120	78%	11.0	36.1	20.0	65.6	
	8135FO	NEC: CL2	5	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	14.0 32.0	6.4 14.5	65.0Ω/M' 213.0Ω/km	20.0Ω/M' 65.6Ω/km	.280 7.11	120	78%	11.0	36.1	20.0	65.6	
	8138FO	NEC: CL2	8	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	22.0 42.0	10.0 19.1	65.0Ω/M' 213.0Ω/km	17.7Ω/M' 58.1Ω/km	.310 7.88	120	78%	11.0	36.1	20.0	65.6	
	8142FO	NEC: CL2	12.5 (12 pairs + 1 single)	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	27.5 54.0	12.5 24.5	65.0Ω/M' 213.0Ω/km	17.7Ω/M' 58.1Ω/km	.385 9.78	120	78%	11.0	36.1	20.0	65.6	
	8148FO	NEC: CL2	18	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	38.5 75.0	17.5 34.5	65.0Ω/M' 213.0Ω/km	15.8Ω/M' 51.8Ω/km	.445 11.31	120	78%	11.0	36.1	20.0	65.6	
	8155FO	NEC: CL2	25	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	42.0 84.0	19.1 38.1	65.0Ω/M' 213.0Ω/km	14.3Ω/M' 47.7Ω/km	.545 13.85	120	78%	11.0	36.1	20.0	65.6	

DCR = DC Resistance • TC = Tinned Copper

*Capacitance between conductors.

**Capacitance between one conductor and other conductors connected to shield.

Datalene insulation features include low dielectric constant and a dissipation factor for high-speed, low-distortion data handling. Physical properties include good crush resistance and light weight.


Overall Beldfoil® Shield

Low-Capacitance Computer Cables for EIA RS-232 and EIA RS-422 Applications


Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

24 AWG Stranded (7x32) TC Conductors • Twisted Pairs • Overall Beldfoil Shield (100% Coverage) • 24 AWG Stranded TC Drain Wire

Polyethylene Insulation • Chrome PVC Jacket

	UL AWM Style 2919 (30V 80°C)	9680	NEC: CM CEC: CM	3 	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	17.0 38.0	7.7 17.3	24.0Ω/M' 78.7Ω/km	14.4Ω/M' 47.2Ω/km	.282 7.16	100	66%	15.5	50.8	27.5	90.2
		9681	NEC: CM CEC: CM	4 	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	24.0 45.0	10.9 20.5	24.0Ω/M' 78.7Ω/km	14.4Ω/M' 47.2Ω/km	.307 7.80	100	66%	15.5	50.8	27.5	90.2
		9682	NEC: CM CEC: CM	6 	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	29.5 56.0	13.4 25.5	24.0Ω/M' 78.7Ω/km	13.1Ω/M' 43.0Ω/km	.342 8.69	100	66%	15.5	50.8	27.5	90.2
		9683	NEC: CM CEC: CM	9 	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	38.0 79.0	17.2 35.9	24.0Ω/M' 78.7Ω/km	12.0Ω/M' 39.4Ω/km	.397 10.10	100	66%	15.5	50.8	27.5	90.2
		9684	NEC: CM CEC: CM	12.5 (12 prs.+ 1 single)	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	49.5 97.0	22.6 44.1	24.0Ω/M' 78.7Ω/km	12.0Ω/M' 39.4Ω/km	.445 11.30	100	66%	15.5	50.8	27.5	90.2

Datalene® Insulation • Chrome PVC Jacket

	UL AWM Style 2919 (30V 80°C)	1419A	NEC: CM CEC: CM FT1	2 	See Chart 5 (Tech Info Section)	500 1000 10000	152.4 304.8 3048.0	13.5 30.0 310.0	6.1 13.6 140.9	24.0Ω/M' 78.7Ω/km	15.1Ω/M' 49.5Ω/km	.248 6.30	100	78%	13	42.7	22	72
		1420A	NEC: CM CEC: CM FT 1	3 	See Chart 5 (Tech Info Section)	500 1000 10000	152.4 304.8 3048.0	15.0 34.0 340.0	6.8 15.5 154.5	24.0Ω/M' 78.7Ω/km	15.1Ω/M' 49.5Ω/km	.261 6.63	100	78%	13	42.7	22	72
		1421A	NEC: CM CEC: CM	4 	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	16.5 37.0	7.5 16.8	24.0Ω/M' 78.7Ω/km	14.4Ω/M' 47.2Ω/km	.280 7.11	100	78%	13	42.7	22	72
		1422A	NEC: CM CEC: CM	5 	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	23.0 43.0	10.5 19.5	24.0Ω/M' 78.7Ω/km	14.4Ω/M' 47.2Ω/km	.294 7.47	100	78%	13	42.7	22	72
		1423A	NEC: CM CEC: CM	6 	See Chart 5 (Tech Info Section)	500 1000 10000	152.4 304.8 3048.0	25.0 48.0 500.0	11.4 21.8 227.3	24.0Ω/M' 78.7Ω/km	13.0Ω/M' 42.7Ω/km	.319 8.10	100	78%	13	42.7	22	72
		1424A	NEC: CM CEC: CM	12.5 (12 prs.+ 1 single)	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	43.0 85.0	19.5 38.6	24.0Ω/M' 78.7Ω/km	13.0Ω/M' 42.7Ω/km	.418 10.62	100	78%	13	42.7	22	72
		1425A	NEC: CM CEC: CM	15 	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	53.0 99.0	24.1 45.0	24.0Ω/M' 78.7Ω/km	11.2Ω/M' 36.7Ω/km	.473 12.01	100	78%	13	42.7	22	72

DCR = DC Resistance • TC = Tinned Copper

*Capacitance between conductors.

**Capacitance between one conductor and other conductors connected to shield.

Datalene insulation features include low dielectric constant and a dissipation factor for high-speed, low-distortion data handling. Physical properties include good crush resistance and light weight.



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Overall Beldfoil® Shield

Audio, Control and Instrumentation Cables
Plenum-Rated and Non-Plenum

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Nominal Capacitance			
					Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

24 AWG Stranded (7x32) TC Conductors • Twisted Pair • Overall Beldfoil Shield* (100% Coverage) • 24 AWG Stranded TC Drain Wire

Polyolefin Insulation • Black Matte PVC Jacket

High-Flex 300V RMS	1508A	NEC: CM	1	Black, Red	500	152.4	6.5	2.9	.008	.20	.024	.61	.131	3.33	31	102	58	190
					1000	304.8	11.0	5.0										



Jacket and shield are bonded so both can be removed with automatic stripping equipment.

Polypropylene Insulation • PVC Jacket (Available in Gray, Brown, Red, Green, Lt. Blue, Purple, White or Black)

300V RMS	1883A	NEC: CMR	1	Black, Red	U-1000	U-304.8	11.0	5.0	.008	.20	.020	.51	.123	3.12	31	102	58	190
					1000*	304.8	11.0	5.0										



Z-Fold®

* 1000 ft. put-up available in Gray only.

Jacket and shield are bonded so both can be removed with automatic stripping equipment. For cross-connect use with 1408R Snake Cables.

Polyethylene Insulation • Chrome PVC Jacket

UL AWM Style 2092 (300V 60°C)	8641	NEC: CM	1	Black, Clear	100	30.5	2.3	1.0	.016	.41	.025	.64	.168	4.27	22	72	42	138				
					U-500	U-152.4	7.5	3.4														
					500	152.4	7.0	3.2														
					U-1000	U-304.8	14.0	6.4														
		CM			1000	304.8	14.0	6.4														
					2000	609.6	28.0	12.7														



For Plenum versions of 8641, see 88641 or 82641.

Plenum • FEP Insulation • Red FEP Jacket

300V RMS, Non-conduit	88641	NEC: CMP	1	Black, Red	100	30.5	2.4	1.1	.006	.15	.014	.36	.106	2.69	31	102	59	194				
					500†	152.4	6.0	2.7														
					1000†	304.8	9.0	4.1														



CMP FT6

Plenum • FEP Insulation • Natural Flamarrest® Jacket

300V RMS, Non-conduit	82641	NEC: CMP	1	Black, Red	U-1000†	U-304.8	9.0	4.1	.006	.15	.014	.36	.106	2.69	31	102	59	194					
					1000†	304.8	8.0	3.6															



CMP FT6

TC = Tinned Copper

*Capacitance between conductors.



**Capacitance between one conductor and other conductors connected to shield.


† Spools and/or UnReel® cartons are one piece, but length may vary ±10% for spools and ±5% for UnReel from length shown.

▲ Beldfoil provides high reliability with ease of termination.

Overall Beldfoil® Shield

Audio, Control and Instrumentation Cables

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Nominal Capacitance			
					Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m
22 AWG Solid Tinned Copper Conductors • Twisted Pairs • Overall Beldfoil Shield (100% Coverage) • 22 AWG Stranded TC Drain Wire																		
PVC Insulation • Chrome PVC Jacket																		
 <p>Shorting Fold</p>	UL AWM Style 2464 (300V 80°C)	9302	NEC: CMG CEC: CMG FT4	2	See Chart 3 (Tech Info Section)	U-500 500 U-1000 1000	U-152.4 152.4 U-304.8 304.8	15.5 15.0 29.0 31.0	7.0 6.8 13.2 14.1	.013 .33	.032 .81	.244 6.20	35 115	50 164	115	50	164	
		9305	NEC: CMG CEC: CMG FT4	4	See Chart 3 (Tech Info Section)	100 U-500 500 U-1000 1000	30.5 U-152.4 152.4 U-304.8 304.8	4.9 22.0 22.5 43.0 45.0	2.2 10.0 10.2 19.5 20.4	.013 .33	.032 .81	.265 6.73	35 115	50 164	115	50	164	
		9306	NEC: CMG CEC: CMG FT4	6	See Chart 3 (Tech Info Section)	500 1000	152.4 304.8	31.5 62.0	14.3 28.2	.013 .33	.032 .81	.315 8.00	35 115	50 164	115	50	164	
		9309	NEC: CMG CEC: CMG FT4	9	See Chart 3 (Tech Info Section)	500 1000	152.4 304.8	44.5 86.0	20.2 39.1	.013 .33	.033 .84	.363 9.22	35 115	50 164	115	50	164	
		9315	NEC: CMG CEC: CMG FT4	15	See Chart 3 (Tech Info Section)	500 1000	152.4 304.8	67.0 133.0	30.5 60.5	.013 .33	.037 .94	.449 11.41	35 115	50 164	115	50	164	
		9319	NEC: CMG CEC: CMG FT4	19	See Chart 3 (Tech Info Section)	500 1000	152.4 304.8	85.0 165.0	38.6 75.0	.013 .33	.040 1.02	.495 12.57	35 115	50 164	115	50	164	
		9327	NEC: CMG CEC: CMG FT4	27	See Chart 3 (Tech Info Section)	500 1000	152.4 304.8	116.0 230.0	52.7 104.5	.013 .33	.045 1.14	.615 15.62	35 115	50 164	115	50	164	
		8751	NEC: CMG CEC: CMG FT4	51	Request Technical Bulletin T/8-4	1000†	304.8	384.0 174.5	.010 .25	.050 1.27	.710 18.03	30 98	42.8 140					
	300V RMS, 60°C																	
																		
For 38-pair polypropylene version of 8751, see 8752.																		

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m
22 AWG Solid Tinned Copper Conductors • Twisted Pairs • Duofoil® Shield (100% Coverage) • 22 AWG Stranded Tinned Copper Drain Wire																		
Datalene® Insulation • Black PVC Jacket																		
UL AWM Style 2668 (300V 60°C)	9184	NEC: CM CEC: CM	2	Black & Yellow, Red & Blue	500 1000	152.4 304.8	29.0 59.0	13.2 26.8	16.5Ω/M' 54.13Ω/km	8.0Ω/M' 26.2Ω/km	.385 9.78	150	78%	8.7	28.5	14.1	46.3	
																		

DCR = DC Resistance • TC = Tinned Copper

*Capacitance between conductors.

**Capacitance between one conductor and other conductors connected to shield.

† Spools are one piece, but length may vary -0 to +20% from length shown.

Datalene insulation features include low dielectric constant and a dissipation factor for high-speed, low-distortion data handling. Physical properties include good crush resistance and light weight.

See Attenuation, Rise Time and Bit Rate data for this series on page 5.10.




Overall Beldfoil® Shield

Audio, Control and Instrumentation Cables

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Nominal Capacitance			
					Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m


22 AWG Solid Tinned Copper Conductors • Twisted Pairs • Overall Beldfoil Shield (100% Coverage) • 22 AWG Solid TC Drain Wire*

Polypropylene Insulation • Gray or Black PVC Jacket

 <p>Z-Fold®</p>	8450	NEC:	1	Black, Red	U-500 [▲]	U-152.4	7.5	3.4	.007	.18	.018	.46	.118	3.00	40	131	76	249			
		CM			U-1000 [▲]	U-304.8	14.0	6.4													
		CEC:			1000	304.8	13.0	5.9													
		CM																			

[▲]U-500 ft. and U-1000 ft. put-ups available in Black only.
Belden's Miniature Type Broadcast Audio and Instrumentation Cables occupy 1/2 to 2/3 less space than standard cables.


Polypropylene Insulation • Chrome PVC Jacket

	8752		38	Request Tech Bulletin T/8-4	250 [†]	76.2	65.0	29.5	.008	.20	.045	1.14	.610	15.50	17	56	24.3	80			
					1000 [†]	304.8	256.0	116.4													


*8752 has a stranded tinned copper drain wire.

22 AWG Stranded (7x30) Tinned Copper Conductors • Twisted Pair • Overall Beldfoil Shield (100% Coverage) • 22 AWG Stranded TC Drain Wire


Semi-rigid PVC Insulation • Pale Fawn Beige Striated PVC Jacket

	9414	NEC:	1	White, Black	U-500	U-152.4	12.0	5.5	.010	.25	.035	.89	.186	4.72	50	164	95	312			
		CMG			500	152.4	11.5	5.2													
		CEC:			U-1000	U-304.8	23.0	10.5													
		CMG FT4			1000	304.8	23.0	10.5													

PVC Insulation • Chrome PVC Jacket

 <p>Z-Fold®</p>	9462	NEC:	1	Black, Red	100	30.5	3.0	1.4	.013	.33	.035	.89	.186	4.72	50	164	90	295			
		CMG			U-500	U-152.4	11.0	5.0													
		CEC:			500	152.4	10.5	4.8													
		CMG FT4			U-1000	U-304.8	21.0	9.5													
					1000	304.8	21.0	9.5													

Polyethylene Insulation • Chrome PVC Jacket

 <p>Z-Fold®</p>	8761	NEC:	1	Black, Clear	U-500	U-152.4	9.0	4.1	.016	.41	.025	.64	.175	4.45	24	79	47	154				
		CM			500	152.4	9.0	4.1														
		CEC:			U-1000	U-304.8	17.0	7.7														
		CM			1000	304.8	18.0	8.2														
									2000	609.6	36.0	16.3										
									5000	1524.0	90.0	40.9										

For Plenum versions of 8761, see 88761, 87761 or 82761.

	9461	NEC:	1	Black, Clear	U-500	U-152.4	11.0	5.0	.016	.41	.026	.66	.180	4.57	24	79	47	154
		CM			U-1000	U-304.8	21.0	9.6										

The jacket and shield are bonded so both can be removed on automatic stripping equipment.

TC = Tinned Copper

*Capacitance between conductors.

**Capacitance between one conductor and other conductors connected to shield.

[†] Spools are one piece, but length may vary -0 to +20% from length shown.

^{††} Length may vary -10% to +20% and may contain 2 pieces. Minimum length of any piece is 1500 ft.


Overall Beldfoil® Shield

Audio, Control and Instrumentation Cables

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Nominal Capacitance			
					Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m


22 AWG Stranded (7x30) TC Conductors • Twisted Pair • Overall Beldfoil Shield (100% Coverage) • 22 AWG Stranded TC Drain Wire (continued)

Polypropylene Insulation • Paper Wrap • Gray or Black PVC Jacket

 <p>Z-Fold®</p>	8451	NEC:	1	Black, Red	100*	30.5	2.3	1.1	.008	.20	.020	.51	.138	3.51	34	112	67	220				
		CMR			U-500	U-152.4	8.5	3.8														
		CEC:			500	152.4	8.0	3.6														
		CMG			U-1000	U-304.8	16.0	7.3														
					1000	304.8	16.0	7.3														

*100 ft. put-up available in Black only.
Unique paper separator facilitates jacket stripping.

Polypropylene Insulation • PVC Jacket (Available in Black, Gray, Brown, Red, Orange, Yellow, Green, Blue, Purple or White)

	9451	NEC:	1	Black, Red	U-500 [▲]	U-152.4	8.5	3.9	.008	.20	.020	.51	.135	3.43	35	115	67	220				
		CMR			500 [▲]	152.4	8.0	3.6														
		CEC:			T-1000 [▲]	T-304.8	18.0	8.2														
		CMG FT4			U-1000	U-304.8	15.0	6.8														
					5000	1524.0	75.0	34.0														


[▲]U-500 ft., 500 ft. and T-1000 ft. put-ups available in Gray only.
The jacket and shield are bonded so both can be removed on automatic stripping equipment. Drain wire is inside foil shield.

Polypropylene Insulation • Black Low-Smoke, Zero-Halogen Jacket

	9451SB <small>new</small>	NEC:	1	Black, Red	1000	304.8	20.0	9.1	.008	.20	.032	.81	.160	4.06	35	115	67	220				
		CMG-LS																				
		CEC:			CMG-LS FT4																	
		CMG-LS FT4			Limited Smoke																	

The jacket and shield are bonded so both can be removed on automatic stripping equipment. Drain wire is inside foil shield.

Polyolefin Insulation • PVC Jacket in Zip-Cord Construction (Red & Green, Red & Black, Red & Purple or Red & Gray)

	9451D	NEC:	2	Black, Red	U-1000	U-304.8	29.0	13.2	.008	.20	.020	.51	.135	3.43	34	112	67	220				
		CMR			2000*	620.8	62.0	28.1							x	x						
		CEC:														.270	6.86					
		CMR FT4																				

*2000 ft. put-up available in Red & Green only.
The jacket and shield are bonded so both can be removed on automatic stripping equipment. Drain wire is inside foil shield.


Plenum • FEP Insulation • White Flamarrest® Jacket in Zip-Cord Construction

	9451DP <small>new</small>	NEC:	2	Black & Red, Black & White	1000	304.8	24.0	10.9	.007	.18	.017	.43	.127	3.23	35	115	67	220			
		CMP													x	x					
		CEC:			CMP FT6											.269	6.83				

The jacket and shield are bonded so both can be removed on automatic stripping equipment. Drain wire is inside foil shield.


22 AWG Stranded (7x30) TC Conductors • Twisted Pairs • Overall Beldfoil Shield (100% Coverage) • 24 AWG Stranded TC Drain Wire

Polypropylene Insulation • PVC Jacket (Available in Brown, Red, Orange, Yellow, Green, Blue, Purple, Gray, White or Black)

	1266A	NEC:	1	Black, Red	U-1000	U-304.8	15.0	6.8	.010	.25	.020	.51	.143	3.63	30	99	54	177				
		CM			1000†	304.8	15.0	6.8														
		CEC:																				
		CM																				

†1000 ft. put-up available in Black only.
Unique design features lower capacitance and greater flexibility than standard audio pair constructions.

PVC Insulation • PVC Jacket (Available in Brown, Red, Orange, Yellow, Green, Blue, Purple, Gray, White or Black)

	1503A	NEC:	1	Black, Red	U-1000	U-304.8	16.0	7.3	.010	.25	.020	.51	.142	3.61	53	174	97	318				
		CM																				
		CEC:																				
		CM																				


TC = Tinned Copper
*Capacitance between conductors.
**Capacitance between one conductor and other conductors connected to shield.


Overall Beldfoil® Shield


Audio, Control and Instrumentation Cables
Plenum-Rated and Non-Plenum


Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Nominal Capacitance			
					Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

22 AWG Stranded (7x30) TC Conductors • Twisted Pair • Overall Beldfoil Shield (100% Coverage) • 22 AWG Stranded TC Drain Wire

Plenum • FEP Insulation • Red FEP Jacket																					
 <p>Z-Fold®</p>	88761	NEC:	1	Black, Red	100†	30.5	2.7	1.2	.006	.15	.014	.36	.119	3.02	35	115	67	220			
		CMP			U-500†	U-152.4	7.5	3.4													
		CEC:			500†	152.4	7.5	3.4													
		CMP FT6			U-1000†	U-304.8	15.0	6.8													
					1000†	304.8	12.0	5.4													


Plenum • FEP Insulation • Red Fluorocopolymer Jacket																					
 <p>Z-Fold®</p>	87761	NEC:	1	Black, Red	500†	152.4	7.0	3.2	.006	.15	.014	.36	.116	2.95	35	115	67	220			
		CMP			1000†	304.8	11.0	5.0													
		CEC:																			
		CMP FT6																			

Plenum • FEP Insulation • Natural Flammarrest® Jacket																					
 <p>Z-Fold®</p>	82761	NEC:	1	Black, Red	U-500†	U-152.4	7.0	3.2	.006	.15	.014	.36	.116	2.95	35	115	67	220			
		CMP			U-1000†	U-304.8	14.0	6.4													
		CEC:			1000†	304.8	11.0	5.0													
		CMP FT6																			

Plenum • FEP Insulation • Flammarrest Jacket (Black, Gray, Brown, Red, Orange, Yellow, Green, Blue, Purple or White)																					
	9451P <small>new</small>	NEC:	1	Black, Red	U-1000	U-304.8	15.0	6.8	.007	.18	.017	.43	.127	3.23	35	115	67	220			
		CMP			5000	1524.0	75.0	34.0													
		CEC:																			
		CMP FT6																			


The jacket and shield are bonded so both can be removed on automatic stripping equipment. Drain wire is inside foil shield.


22 AWG Stranded (19x34) TC Conductors • Dual Twisted Pairs • Overall Beldfoil Shield (100% Coverage) • 24 AWG Stranded TC Drain Wire

PVC Insulation • PVC Jacket in Zip-Cord Construction (Red & Green, Red & Black, Red & Purple or Red & Gray)																					
	1504A	NEC:	2	Black, Red	U-1000	U-304.8	32.0	14.5	.010	.25	.020	.51	.143	3.63	57	187	100	328			
		CM			2000††	609.8	64.0	29.0							x	x					
		CEC:														.286	7.26				
		CM																			

††2000 ft. put-up available in Red & Gray or Red & Green only.
The jacket and shield are bonded so both can be removed on automatic stripping equipment. Drain wire is inside foil shield.

20 AWG Stranded (7x28) TC Conductors • Twisted Pair • Overall Beldfoil Shield (100% Coverage) • 20 AWG Stranded TC Drain Wire

Polyethylene Insulation • Chrome PVC Jacket																					
 <p>Shorting Fold</p>	8762	NEC:	1	Black, Clear	100	30.5	3.2	1.5	.016	.41	.028	.71	.204	5.18	27	89	49	161			
		CM			250	76.2	6.3	2.8													
		CEC:			U-500	U-152.4	12.0	5.5													
		CM			500	152.4	12.0	5.5													
					U-1000	U-304.8	23.0	10.5													
					1000	304.8	23.0	10.5													
					2000	609.6	46.0	20.9													
	10000	3048.0	240.0	109.1																	

	9464	NEC:	1	Black, Clear	U-500	U-152.4	17.0	7.7	.016	.41	.035	.89	.214	5.44	27	89	49	161		
		CM			U-1000	U-304.8	32.0	14.5												
		CEC:																		
		CM																		

The jacket and shield are bonded so both can be removed on automatic stripping equipment. Drain wire is on the inside of foil shield.

TC = Tinned Copper

*Capacitance between conductors.

**Capacitance between one conductor and other conductors connected to shield.

†Spools and/or UnReel® cartons are one piece, but length may vary ±10% for spools and ±5% for UnReel from length shown.




Overall Beldfoil® Shield

Audio, Control and Instrumentation Cables

Plenum-Rated and Non-Plenum


Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Nominal Capacitance			
					Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

20 AWG Stranded (7x28) TC Conductors • Twisted Pair • Overall Beldfoil Shield (100% Coverage) • 20 AWG Stranded TC Drain Wire (cont.)
PVC Insulation • Beige PVC Jacket


UL AWM Style 2464 (300V 80°C)  Z-Fold®	9154	NEC:	1	Black, Red	U-500	U-152.4	11.5	5.2	.014	.36	.031	.79	.198	5.03	60	197	100	328			
		CMG			500	152.4	12.0	5.5													
		CEC:			U-1000	U-304.8	22.0	10.0													
		CMG FT4			1000	304.8	23.0	10.5													

9154 has 22 AWG stranded tinned copper drain wire.

18 AWG Stranded (16x30) TC Conductors • Twisted Pair • Overall Beldfoil Shield (100% Coverage) • 20 AWG Stranded TC Drain Wire
Polyethylene Insulation • Chrome PVC Jacket


UL AWM Style 2092 (300V 60°C)  Shorting Fold	8760	NEC:	1	Black, Clear	250	76.2	6.8	3.1	.019	.48	.028	.71	.222	5.64	24	79	44	144				
		CM			U-500	U-152.4	13.5	6.1														
		CEC:			500	152.4	13.0	5.9														
		CM			U-1000	U-304.8	25.0	11.3														
					1000	304.8	26.0	11.8														
					2000	609.6	50.0	22.7														

For Plenum versions of 8760, see 88760, 87760 or 82760.


	9460	NEC:	1	Black, Clear	U-500	U-152.4	18.5	8.4	.019	.48	.030	.76	.230	5.84	24	79	44	144
		CM			U-1000	U-304.8	36.0	16.4										

The jacket and shield are bonded so both can be removed on automatic stripping equipment. Drain wire is on the inside of foil shield.


18 AWG Stranded (19x30) TC Conductors • Twisted Pair • Overall Beldfoil Shield (100% Coverage) • 20 AWG Stranded TC Drain Wire
Plenum • FEP Insulation • Red FEP Jacket

300V RMS  Z-Fold®	88760	NEC:	1	Black, Red	100	30.5	3.7	1.7	.007	.18	.014	.36	.150	3.81	51	167	97	318			
		CMP			U-500	U-152.4	12.5	5.7													
		CEC:			500†	152.4	11.0	5.0													
		CMP FT6			U-1000	U-304.8	24.0	10.9													

Plenum • FEP Insulation • Red Fluorocopolymer Jacket

300V RMS  Z-Fold®	87760	NEC:	1	Black, Red	U-500	U-152.4	12.5	5.7	.007	.18	.014	.36	.150	3.81	51	167	97	318			
		CMP			500†	152.4	10.5	4.8													
		CEC:			1000†	304.8	21.0	9.5													
		CMP FT6																			

Plenum • FEP Insulation • Natural Flamarrest® Jacket

300V RMS  Z-Fold®	82760	NEC:	1	Black, Red	U-500†	U-152.4	12.0	5.4	.007	.18	.014	.36	.150	3.81	51	167	97	318			
		CMP			U-1000†	U-304.8	22.0	10.0													
		CEC:			1000†	304.8	21.0	9.5													
		CMP FT6																			

TC = Tinned Copper


*Capacitance between conductors.


**Capacitance between one conductor and other conductors connected to shield.


† Spools and/or UnReel® cartons are one piece, but length may vary ±10% for spools and ±5% for UnReel from length shown.

Overall Beldfoil® Shield

Audio, Control and Instrumentation Cables

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Nominal Capacitance							
					Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m				
16 AWG Stranded (19x29) TC Conductors • Twisted Pair • Overall Beldfoil Shield (100% Coverage) • 18 AWG Stranded TC Drain Wire																						
Polyethylene Insulation • Chrome PVC Jacket																						
UL AWM Style 20253 (600V 80°C)  Shorting Fold	8719	NEC: CM, CL2 CEC: CM	1	Black, Clear	U-500	U-152.4	24.0	11.1	.032	.81	.032	.81	.313	7.95	23	75	44	144				
					500	152.4	25.5	11.6														
					U-1000	U-304.8	47.0	21.3														
					1000	304.8	50.0	22.7														
					2000	609.6	100.0	45.5														
					5000	1524.0	245.0	111.4														
	10000	3048.0	510.0	231.3																		

14 AWG Stranded (19x27) TC Conductors • Twisted Pair • Overall Beldfoil Shield (100% Coverage) • 16 AWG Stranded TC Drain Wire																						
Polyethylene Insulation • Chrome PVC Jacket																						
UL AWM Style 20253 (600V 80°C)  Z-Fold®	8720	NEC: CM, CL2	1	Black, Clear	U-500	U-152.4	34.0	15.4	.032	.81	.035	.89	.355	9.02	24	79	47	154				
					500	152.4	35.0	15.9														
					1000	304.8	71.0	32.3														
					2000	609.6	138.0	62.7														

12 AWG Stranded (19x25) TC Conductors • Twisted Pair • Overall Beldfoil Shield (100% Coverage) • 14 AWG Stranded TC Drain Wire																						
Polyethylene Insulation • Chrome PVC Jacket																						
UL AWM Style 20253 (600V 80°C)  Z-Fold®	8718	NEC: CL2	1	Black, Clear	U-500	U-152.4	47.5	21.6	.037	.94	.040	1.02	.400	10.16	25	82	49	161				
					500	152.4	50.5	22.9														
					1000	304.8	100.0	45.5														
					2000	609.6	198.0	90.0														

TC = Tinned Copper

*Capacitance between conductors.

**Capacitance between one conductor and other conductors connected to shield.